

Form PTO-1390
P21860.P01U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

P21860

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371U.S. APPLICATION NO. (If known, see 37 CFR
1.5)

100192704

INTERNATIONAL APPLICATION NO.

PCT/JP00/04971

INTERNATIONAL FILING DATE

26 July 2000

PRIORITY DATE CLAIMED

26 July 1999

TITLE OF INVENTION

METHOD FOR DETECTING DISTANCE AND DISTANCE DETECTION APPARATUS

APPLICANT(S) FOR DO/EO/US


Tadashi HAYAKAWA

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3))
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
"Executed"
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (U.S.C. 371(c)(5)).

Items 11 to 16 below concern other document(s) or information included:

11. Assignee: MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. of Osaka, JAPAN
12. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
13. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
14. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☒ Figure of Drawing to be published 1
18. ☒ Other items or information:
International Application as published Cover Sheet(in Japanese).
PCT/RO/101-PCT Request(in Japanese).
PCT/IB/304.
PCT/IB/308.
PCT/IB/332.
PCT/ISA/210.
Claim of Priority.

U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/019270		INTERNATIONAL APPLICATION NO. PCT/JP00/04971		ATTORNEY'S DOCKET NUMBER P21860	
19. The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5)): Search report has been prepared by the EPO or JPO. \$ 890.00 International preliminary examination fee paid to USPTO (37 CFR 1.482). \$ 710.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO(37 CFR 1.445(a)(2)). \$ 740.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2) paid to USPTO. \$1,040.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4). \$ 100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS	PTO USE ONLY
				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than 20 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
Claims	Number Filed	Number Extra	RATE		
Total Claims	22 - 20 =	2	X \$18.00	\$36.00	
Independent Claims	5 - 3 =	2	X \$84.00	\$168.00	
Multiple dependent claim(s) (if applicable)			+ \$280.00	\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1094.00	
Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	
SUBTOTAL =				\$1094.00	
Processing fee of \$130.00 for furnishing the English translation later than 20 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				+	
Extension of Time fee in the amount of \$					
TOTAL NATIONAL FEE =				\$1094.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+	\$40.00
TOTAL FEES ENCLOSED =				\$1134.00	
				Amount to be refunded	\$
				Charged	\$
<p>a. <input checked="" type="checkbox"/> A check in the amount of \$1134.00 to cover the above fees is enclosed.</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 19-0089.</p> <p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p> <p>SEND ALL CORRESPONDENCE TO CUSTOMER NO. 7055 AT THE PRESENT ADDRESS OF: Bruce H. Bernstein GREENBLUM & BERNSTEIN, P.L.C. 1941 Roland Clarke Place Reston, VA 20191 (703) 716-1191</p>					
 07055 PATENT TRADEMARK OFFICE			 SIGNATURE Bruce H. Bernstein NAME 33,329 29,027 REGISTRATION NUMBER		

3/ppts 1

DESCRIPTION

METHOD FOR DETECTING DISTANCE AND DISTANCE DETECTION
APPARATUS

5

Technical Field

The present invention relates to a distance detection apparatus and a method therefor, both suitable for detecting a relative distance between mobile stations or a relative distance between a mobile station and a base station. In particular, the present invention relates to a distance detection apparatus and a method therefor, both suitably applicable to a mobile communication system in conformity with the spectrum spreading communication mode.

15

Background Art

Conventionally, there has been developed a distance detection apparatus for detecting a relative distance between two mobiles by means of the communication conforming to the spectrum spreading communication mode. For example, in the vehicle communication apparatus disclosed in Japanese Laid-Open Publication No. HEI 5-122120, when a certain communication station MS-1 transmitted a radio wave modulated in conformity with the spreading modulation to another communication station MS-2 and the communication station MS-2 received the transmitted wave, the communication station MS-2 transmits a radio wave modulated

in conformity with the spreading modulation by the use of a spreading code synchronized with the spreading code of the received wave back to the communication station MS-1.

When the communication station MS-1 received the
5 responded wave from the communication station MS-2, the communication station MS-1 detects the period of time from the transmission of the radio wave to the reception of the responded wave from the communication station MS-2, and detects the relative distance between the communication
10 station MS-1 and the communication station MS-2 on the basis of the following formula (1).

$$\text{Relative Distance} = (\text{Light velocity}) \times (\text{Time Difference}) / 2 \quad \dots (1)$$

However, the aforesaid vehicle communication
15 apparatus has a problem that it cannot perform the distance detection with high accuracy owing to signal delays in the transmission circuits thereof and the reception circuits thereof.

20 Disclosure of Invention

The present invention was invented in consideration of the problem, and aims to provide a method for detecting distance and a distance detection apparatus, both capable of removing the errors of distance detection caused by signal
25 delays in the transmission circuits thereof and the reception circuits thereof.

A method for detecting a distance according to the

present invention is a method for detecting a distance by measuring the propagation time of an electromagnetic wave, and the method inputs a transmission signal output from a transmission system circuit directly into a reception system circuit, and obtains the signal delay time of the transmission and reception circuit by measuring a difference between the reception timing of the transmission signal that has passed through the reception system circuit and the transmission timing of the transmission signal, and then performs the correction of the measured distance by using the obtained signal delay time.

According to the method, the sum of the signal delay time of the transmission system circuit and the signal delay time of the reception system circuit are measured, and the measured sum of the signal delay times is used as a correction value at the time of obtaining a measurement distance. Consequently, respective signal delay times of the transmission system circuit and the reception system circuit are canceled. Thereby, distance detection with high accuracy becomes possible.

Moreover, a method for detecting a distance according to the present invention receives a reflection signal of a transmission signal from an object of distance measurement, and measures the phase difference between the reception signal and the transmission signal, and detects the relative distance to the object of distance measurement on the basis of the measurement result, and further corrects the detected

relative distance by means of the signal delay time in a transmission and reception circuit, the signal delay time being a measurement result of the difference between the reception timing of the transmission signal in the reception system circuit and the transmission timing of the transmission signal.

According to the method, the sum of the signal delay time of the transmission system circuit and the signal delay time of the reception system circuit is measured, and the measured sum of the signal delay times is used as a correction value at the time of obtaining a measurement distance to the object of distance measurement. Consequently, respective signal delay times of the transmission system circuit and the reception system circuit are canceled. Thereby, distance detection with high accuracy becomes possible.

Moreover, a distance detection apparatus according to the present invention adopts a configuration comprising: a transmission system circuit in which a timer of a self station generates a periodic signal that is transmitted to an opponent station; a reception system circuit for receiving a periodic signal generated by a timer of the opponent station and transmitted to the self station; a signal path for inputting the transmission signal from the transmission system circuit to the reception system circuit directly; and a distance detection section for measuring a difference between the transmission timing at the time

of the transmission of the signal from the transmission system circuit and the reception timing at the time of the input of transmission signal to the reception system circuit through the signal path to obtain a self station signal delay time, and for measuring a quantity of discrepancy between a reception timing of the transmission signal from the opponent station and the reference timing of the timer of the self station to obtain a self station detection phase difference, and for detecting a relative distance between the self station and the opponent station by the use of the self station signal delay time, the self station detection phase difference, the opponent station signal delay time obtained by the opponent station, and the opponent station detection phase difference.

According to the configuration, by the measurement of the respective sums of the signal delay times of the transmission system circuits and the signal delay times of the reception system circuits of the two communication stations, and by the use of the respective sums of the signal delay times as correction values at the time of the obtainment of a relative distance between the two communication stations, signal delay times of the respective transmission system circuits and the respective reception system circuits of the two communication stations are canceled, and then distance detection with high accuracy becomes possible.

Brief Description of Drawings

FIG. 1 is a block diagram showing the basic configuration of the distance detection apparatus according to embodiment 1 of the present invention;

5 FIG. 2 is a block diagram showing the configuration of the distance detection apparatus according to embodiment 7 of the present invention; and

10 FIG. 3 is a timing chart for illustrating a delay profile of the distance detection apparatus according to embodiment 8.

Best Mode for Carrying Out the Invention

Hereinafter, embodiments of the present invention will be described by reference to the attached drawings.

15 (EMBODIMENT 1)

FIG. 1 is a block diagram showing the basic configuration of the distance detection apparatus according to the embodiment 1 of the present invention. In the figure, the distance detection apparatus according to the embodiment 1 are severally mounted on communication stations 10, 20 for transmitting signals and receiving them by means of electric waves. The communication stations 10, 20 includes reference timers 11, 21, signal generation sections 12, 24, transmission system circuits 13, 25, signal reception sections 14, 23, reception system circuits 15, 22 and antennas 16, 26 for both of transmitting and receiving.

In the distance detection apparatus according to the embodiment 1, the signal generation section 12 and the signal reception section 14 in the communication station 10 on one side and the signal reception section 23 and the signal generation section 24 in the communication station 20 on the other side are embodied as microcomputers 17, 27 respectively.

In not shown memories mounted on the microcomputers 17, 27 are written programmed data of a distance detection method (distance detection program), which will be described in the following. Incidentally, it is preferable to use a magnetic recording medium such as a hard disk apparatus, a floppy disk, CD-ROM, CD-RW, and MO, an optical recording medium and an optical magnetic recording medium besides the aforesaid memory as a recording medium for storing the distance detection program.

A signal line 18 (28) connecting between the antenna 16 (26) for both of transmitting and receiving and the transmission system circuit 13 (25) or the reception system circuit 15 (22) corresponds to signal input means. The reference numerals inserted in the parentheses indicate the constituent elements on the communication station 20 side.

Incidentally, it is supposed that the period of the reference timer 11 and the period of the other reference timer 21 are the same. It is also supposed that the time difference ΔT shown in FIG. 1 becomes > 0 (positive) when the time of the reference timer 21 of the other communication

10019270-010302

station 20 is earlier than the time of the reference timer 11 of the one side communication station 10, and becomes < 0 (negative) when the former is later than the latter. Moreover, the following description will be given on the
5 supposition that the timer of the other side reference timer 21 is earlier than the time of the one side reference timer 11.

Now, the one side communication station 10 transmits
a signal having a period synchronized with the reference
10 timing based on the reference timer 11 (periodic signal)
to the other side communication station 20. For simplifying
the description, the transmission timing is supposed to
be the initial phase of the reference timer 11. When the
other side communication station 20 receives the periodic
15 signal transmitted from the one side communication station
10, the other side communication station 20 transmits a
periodic signal synchronized with the reference timing
based on the reference timer 21 in the communication station
20 to the one side communication station 10. For simplifying
20 the description, the transmission timing of the other side
communication station 20 is supposed to be the initial phase
of the reference timer 21. Then, the one side communication
station 10 receives the periodic signal transmitted from
the other side communication station 20 to detect the phase
25 difference between the received periodic signal and the
previously transmitted periodic signal, and then the
communication station 10 corrects the signal delay time

100-49370-0403001

of the self station, which will be described later, on the basis of the detected phase difference. A distance is calculated by the use of the correction value.

The other side communication station 20 also detects, similarly, the phase difference on the basis of the transmission timing to the one side communication station 10 and the reception timing, and further measures the signal delay time in the communication station 20. And then, the communication station 20 transmits the phase difference and the signal delay time detected by the communication station 20 or the correction value of the signal delay time corrected on the basis of the phase difference to the one side communication station 10. As will be described later, after the timer correction has been performed in a communication station, the distance calculation becomes possible without receiving the correction value of the opponent station.

Although the transmission timing of the transmission signals of the communication stations 10, 20 is supposed to be the initial phases of respective reference timers 11, 21 for the simplification of the description, the transmission timing is not necessarily the initial phase as long as the communication stations 10, 20 transmit the transmission timing at the same phase.

The case described above is the case where the one side communication station 10 is a station that performs the distance measurement. In the case where the other side

communication station 20 is a station that performs the distance measurement, the transmission station and the reception station are exchanged.

Incidentally, although the description will
5 hereinafter be given for the simplification of the description to a case where the one side communication station 10 transmits a transmission signal to the other side communication station 20 for the measurement of a distance and the other side communication station 20 that
10 received the transmission signal transmits the transmission signal for the measurement of the distance back to the one side communication station 10 by the use of the transmission signal as a trigger, the present invention is not restricted to such a case. That is, when
15 both of the communication stations 10, 20 are communicating about a thing unrelated to the measurement of distance, both the communication stations 10, 20 can severally perform the measurement of distance by utilizing transmission signals and reception signals in the communication. When
20 an opponent station transmits a signal delay time in the transmission and reception circuit of the opponent station and correction information calculated by using the signal delay time, it is considerable to use the information by extracting from the reception signal.

25 Moreover, when the one side communication station 10 detects the distance between the communication station 10 and the other side communication station 20, the

10015270-010302

communication station 10 measures a signal delay time of the transmission and reception circuit (the transmission system circuit 13 and the reception system circuit 15), which causes errors, in the one side communication station.

5 That is, the communication station 10 measures the difference between the transmission timing and the reception timing by turning back the transmission signal at a signal line 18 to receive the tuned back transmission signal. The communication station 10 corrects the distance
10 measurement value with the measured value to cancel the signal delay time at the transmission and reception circuit, and consequently high accuracy distance detection become possible. Incidentally, in the case where the other side communication station 20 is a station that performs the
15 distance measurement, the other side communication station 20 measures the signal delay time of the transmission and reception system circuit (the reception system circuit 22 and the transmission system circuit 25) in the communication station 20 to use the measured signal delay time as a
20 correction value.

Hereinafter, the distance detection method will be described.

Here, the signal delay time of the transmission system circuit 13 in the communication station 10 is supposed to
25 be t_1 ; the signal delay time of the reception system circuit 15 is supposed to be t_4 ; the signal delay time of the reception system circuit 22 in the communication station 20 is supposed

to be t_2 ; and the signal delay time of the transmission system circuit 25 is supposed to be t_3 .

The communication stations 10, 20 severally transmit a signal for distance measurement to an opponent station
5 on the basis of the reference timers 11, 21 of the self station, and receive a signal for distance measurement from the opponent station to measure phase differences T_a , T_b between the signal transmitted from the self station and the signal transmitted from the opponent station.

10 Moreover, respective communication stations 10, 20 turn back transmission signals from the self stations at the signal lines 18, 28, and input the turned back transmission signals to the reception system circuits 15, 22 of the self stations to receive them. And then, the
15 communication stations 10, 20 measure the differences between the transmission timing and the reception timing at that time. The values of t_1 , t_2 , t_3 and t_4 cannot be measured separately in the measurements. However, the communication station 10 can measure the value of $(t_1 +$
20 $t_4)$, and the communication station 20 can measure the value of $(t_2 + t_3)$. In this case, the value of $(t_1 + t_4)$ is a sum of respective signal delay times of the transmission system circuit 13 and the reception system circuit 15 in the communication station 10, and the value of $(t_2 + t_3)$
25 is a sum of respective signal delay times of the transmission system circuit 25 and the reception system circuit 22 in the communication station 20.

As apparent from FIG. 1, the relationships between the phase differences T_b , T_a , a signal propagation time T , the time differences ΔT , and the signal delay times t_1 , t_2 , t_3 , t_4 meet the following formulae (2), (3).

5 $T_a = T + t_3 + t_4 - \Delta T \dots (2)$

$T_b = T + t_1 + t_2 + \Delta T \dots (3)$

The communication stations 10, 20 perform the corrections of the phase differences T_a , T_b in conformity with the following formulae (4), (5) by the use of signal delay times $(t_1 + t_4)$, $(t_2 + t_3)$, and transmit the corrected phase differences T_{ah} , T_{bh} to the opponent stations.

$T_{ah} = T_a - (t_1 + t_4) \dots (4)$

$T_{bh} = T_b - (t_2 + t_3) \dots (5)$

When the signal delay times t_1 , t_4 , t_2 and t_3 are supposed to be zero, the relative distance R between the communication stations can be detected by the following formula (6).

$R = c \times T = c \times (T_a + T_b) / 2 \dots (6)$

Where "c" indicates light velocity.

20 Because the signal delay times t_1 , t_4 , t_2 , and t_3 are actually not zero, the T_a and T_b on the right side of the formula (6) are replaced by the T_{ah} , T_{bh} , and then the formulae (4), (5) are substituted to obtain the following formula (7). Moreover, when the formulae (2), (3) are substituted, the following formula (8) is obtained.

25 $c \times (T_{ah} + T_{bh}) / 2 = c \times \{T_a + T_b - (t_1 + t_2 + t_3 + t_4)\} / 2 \dots (7)$

40019270-010302

$$c \times (T_{ah} + T_{bh}) / 2 = c \times T \dots (8)$$

The formula (8) is nothing else but the following formula (9) that is the formula (6) in which the T_a , T_b are substituted by the T_{ah} , T_{bh} . Consequently, the relative distance R can be obtained in conformity with the formula (9).

$$R = c \times T = c \times (T_{ah} + T_{bh}) / 2 \dots (9)$$

On the other hand, the discrepancy quantity $\Delta T_b (= -\Delta T)$ of the reference timer 21 in the other side communication station 20 from the reference timer 11 in the one side communication station 10 when the reference timer 11 in the communication station 10 is taken as a reference can be obtained in conformity with the following formula (10) in the case where the signal delay times t_1 , t_4 , t_2 and t_3 are supposed to be zero.

$$\Delta T_b = -\Delta T = (T_a - T_b) / 2 \dots (10)$$

When the processing for the adjustment of the reference timer in the communication station 20 to the reference timer in the communication station 10 based on the timer discrepancy quantity ΔT_b is performed and the measurement phase differences are indicated by τ_a (communication station 10), τ_b (communication station 20), the measurement phase differences τ_a , τ_b are expressed by the following formulae (11)-(13).

$$\tau_a = T_a + \Delta T_b = T \dots (11)$$

$$\tau_b = T_b - \Delta T_b = T \dots (12)$$

$$R = c \times T = c \times \tau_a = c \times \tau_b \dots (13)$$

Because the aforesaid processing is to turn back the other side reference timer 21 by the time difference ΔT by the correction of the gains of the reference timer 21, the communication station 20 newly detects a value
 5 obtained by the addition of the time difference ΔT to the value T_b that has been detected as the reception timing until that time. The value is the τ_b in the formula (12).

Until that time, the communication station 20 has transmitted signals at the initial phase when the reference
 10 timer 11 in the communication station 10 is $-\Delta T$. However, because the other side reference timer 21 was corrected, the signals are transmitted with a retardation of that period of time. Consequently, a value obtained by the subtraction of the time difference ΔT from the value T_a that has been
 15 detected as the reception timing of the communication station 10 until that time is newly detected. The newly detected value is the τ_a in the formula (11).

As it is known from the formulae (11)-(13), if the reference timers 11, 21 are once set at the same time between
 20 the communication station 10 and the communication station 20, the notification from an opponent station is hereafter unnecessary, and the relative distance R can be detected only by the measurement of the reception timing of a transmission signal from the opponent station.

25 Because the signal delay times t_1 , t_4 , t_2 and t_3 are actually not zero, when the T_a , T_b on the right side of the formula (10) are replaced by T_{ah} , T_{bh} and formulae (4),

10019270-010302

(5) are substituted, the following formula (14) is obtained. Moreover, if the formulae (2), (3) are substituted, the following formula (15) can be obtained.

$$(T_{bh} - T_{ah}) / 2 = \{T_b - T_a - (t_2 + t_3 - t_1 - t_4)\} / 2 \dots (14)$$

$$\Delta T_h = (T_{bh} - T_{ah}) / 2 = \Delta T + t_1 - t_3 \dots (15)$$

If the quantity ΔT_{bh} of correction of the reference timer 21 in the communication station 20 is supposed to be $-\Delta T_h$ in the case where the reference timer 21 in the communication station 20 is adjusted on the basis of the reference timer 11 in the communication station 10, the detection phase difference τ_a in the communication station 10 and the detection phase difference τ_b in the communication station 20 after the adjustment of the reference timer 21 are expressed by the following formulae (16), (17).

$$\tau_a = T_a + \Delta T_{bh} \dots (16)$$

$$\tau_b = T_b - \Delta T_{bh} \dots (17)$$

Because the gains of the reference timer 21 is corrected to turn back the timer 21 by ΔT_h similarly to the description about the formulae (11)-(13), the communication station 20 detects a new value obtained by the addition of the ΔT_h to the value T_b that has been detected as the reception timing until that time. The new value is the τ_b in the formula (17). Because the timer 21 was corrected although the communication station 20 transmitted a signal when the time of the communication

station 10 was $-\Delta T_h$ until that time, the signals is transmitted with the retardation of that period of time. Consequently, a value obtained by the subtraction of the ΔT_h from the value T_a that has been detected as the reception
 5 timing of the communication station 10 until that time is newly detected. The value is the τ_a in the formula (16).

When the formula (2) and (15) are substituted into the formula (16), the following formula (18) is obtained. Moreover, when the formula (3) and (15) are substituted
 10 in to the formula (17), the following formula (19) is obtained.

$$\tau_a = T + t_1 + t_4 \dots (18)$$

$$\tau_b = T + t_2 + t_3 \dots (19)$$

If corrected phase differences obtained by the
 15 correction of the τ_a , τ_b in conformity with the aforesaid correction formulae (4), (5) are designated by τ_{ah} , τ_{bh} , the phase differences τ_{ah} , τ_{bh} is expressed by the following formula (20) to be equal to the propagation time T of the propagation signal.

$$20 \quad T = \tau_{ah} = \tau_{bh} \dots (20)$$

The following formula (21) obtained by the multiplication of the light velocity "c" to both the sides of the formula (20) is nothing else but the formula (13) in which the τ_a , τ_b are replaced by the τ_{ah} , τ_{bh} .

$$25 \quad R = c \times T = c \times \tau_{ah} = c \times \tau_{bh} \dots (21)$$

As apparent from the aforesaid, when a sum value of the signal delay times t_1 , t_4 , t_2 and t_3 of the transmission

system circuits 13, 25 and the reception system circuits 15, 22 of the communication stations 10, 20 is measured and a value obtained by the correction of the detected phase differences T_a , T_b by the formulae (4), (5) is determined
 5 as the correction phase difference $T_{ah} + T_{bh}$, then the relative distance R between the communication station 10 and the communication station 20 can be detected.

In particular, as described in the explanation concerning the formulae (14)-(21), although respective
 10 values of the time differences ΔT of the reference timers 11, 21, and the signal delay times t_1 , t_2 , t_3 and t_4 of the transmission and reception system circuits 13, 15, 22 and 25 cannot be obtained, the relative distance R can be detected by the use of only the phase difference information
 15 measured in the self station after the adjustment of the reference timers 11, 21 of the communication station 10 and the communication station 20.

Incidentally, in the case where the reference timer 11 of the communication station 10 is adjusted on the basis
 20 of the reference timer 21 of the communication station 20, the adjustment may be performed by the inversion of the sign of the correction quantity of the timer 21.

Moreover, after the determination of the correction quantity ΔT_{bh} of the reference timer 21 in the communication
 25 station 20, the relative distance R between the communication station 10 and the communication station 20 can be obtained in conformity with the formula (22).

$$R = c \times (T_{ah} - \Delta T_{bh}) \dots (22)$$

As described above, in the distance detection apparatus according to the embodiment 1, the sum value of the delay times t_1 , t_4 and the sum value of the delay times t_2 , t_3 of the transmission system circuits 13, 25 and the reception system circuits 15, 22 of the communication stations 10, 20 are measured, and the sums of the signal delay times are used as the correction values when the relative distance R is obtained. Consequently, the signal delay times of the signal transmission system circuits 13, 25 and the signal delay times of the reception system circuits 15, 22 are canceled, and thereby high accuracy distance detection becomes possible.

(EMBODIMENT 2)

The aforesaid distance detection apparatus according to the embodiment 1 can be applied to an apparatus that needs distance information such as a position cognition apparatus, a speed detection apparatus, an on-vehicle apparatus, a mobile, a fixed station and a traffic information generation apparatus.

For example, a system in which a transmission signal transmitted by a radio apparatus of a car is reflected by the body of an opponent car and the reflection wave is received will be considered. It is supposed that the communication station 10 in FIG. 1 is a radio apparatus of a self car and the communication station 20 is a radio apparatus of an opponent car. Then, the signal delay times

t2, t3 of the reception system circuit 22 and the transmission system circuit 25 of the opponent car are zero, and the state is equivalent to the case where the time differences ΔT of the reference timers 11, 21 are zero.

5 However, there is no information of the correction phase difference T_{bh} from the radio apparatus of the opponent car. In this case, the distance R can be detected in conformity with the formula (21).

$$R = c \times \{T_a - (t_1 + t_4)\} / 2 \dots (23)$$

10 where T_a designates a phase difference between the reception signal and the transmission signal when the transmission signal from the radio apparatus of the self car is reflected on the body of the opponent car and the self car receives the reflection wave, i.e. the reception signal.

15 (EMBODIMENT 3)

Another system in which a signal transmitted by the radio apparatus of a self car is received by the radio apparatus of an opponent car and the radio apparatus of the opponent car ideally transmits a response signal at
 20 a zero response time and further the self car receives the response signal will be considered. When the radio apparatus of the opponent car informs the signal delay times $t_2 + t_3$ of the reception system circuit 22 and the transmission system circuit 25 to the radio apparatus of the self car,
 25 the distance R can be calculated in conformity with the formula (24). In this case also, there is no information of the correction phase difference T_{bh} from the radio

10019270-010302

apparatus of the opponent car.

$$R = c \times \{T_a - (t_1 + t_4) + (t_2 + t_3)\} / 2 \dots (24)$$

Because it is actually impossible to make the response time zero, there is used as a measure against the problem a way in which the opponent car informs the reception time T1 when the opponent car received the transmission signal from the radio apparatus of the self car and the transmission time T2 when the radio apparatus of the opponent car transmitted a transmission signal to the radio apparatus of the self car. In this case also, because the radio apparatus of the opponent car informs the signal delay time t2 + t3 to the self car, the distance R can be calculated. (EMBODIMENT 4)

Although the present invention can be applied to general radio communications systems, in the case where the invention is particularly applied to the spectrum spreading communication mode, an implemented distance detection apparatus has excellent distance resolution, the synchronization adjustment of the spreading code of a reception signal is equivalent to the measurement of the phase difference of the signal as it is. Consequently, it is easy to make the present invention practicable in conformity with the spectrum spreading communication method.

Hereinafter, the accuracy of distance detection and the specifications of radio communication will be described in the following including an embodiment.

10019270-010302

The distance R can be measured by the measurement of the propagation time T of an electromagnetic wave on one way by performing an exchange of the electromagnetic wave between a measurement instrument and a measurement object, and by the multiplication of the light velocity ($c = 3.0 \times 10^8$ [m/s]) to the propagation time T. In this case, a distance dx calculated by the multiplication of the light velocity "c" to the time resolution dT of the propagation time T is the distance resolution. On the contrary, the dT calculated by the division of the allowable error of distance dx by the light velocity is the allowable error of time.

When the application of the present invention to a car collision prevention apparatus is considered, the communication stations 10, 20 shown in FIG. 1 are radio communication stations for distance detection to be mounted on cars.

Now, if it is supposed that the allowable distance error in the measurement of the distance between a car and the one in front for the prevention of collision is the order of one meter, the allowable error dT of measuring time is the order of about three nanoseconds. When a spectrum spreading signal is used as the distance measurement signal, the order of a chip rate for the obtainment of time resolution corresponding to the distance resolution of the order of one metering is about 100 MHz. A spectrum spreading apparatus having a chip rate of the order of 100 MHz can easily be

realized. In this case, because the gate delay time of the transmission and reception system circuits of a communication apparatus is generally in an order of several tens or hundreds nanoseconds, gate delay errors cannot be neglected. Even if the gate delay time is corrected to be calculated as a designed value, the gate delay time scarcely accords with the designed value because there is dispersion in the manufacture thereof.

Accordingly, if the distance detection method of the present invention is applied, because the distance detection method of the invention turns back transmission signals of self stations at signal lines 18, 28 to input them into the reception system circuits 15, 22 and thereby phase differences between the transmission signals and the reception signals, which are received transmission signals, the gate delay errors including the dispersion in the manufacture can be measured in resolution of about three nanoseconds.

Consequently, by the use of the distance detection method of the present invention, the measurement of the distance between a car and the one in front can be enabled in distance resolution of the order of one meter, and it becomes possible to realize a collision prevention apparatus at a level of practical use.

(EMBODIMENT 5)

As another embodiment, a position detection apparatus such as a locator and a navigator in a cellular mobile

telephone system can be realized. For example, the present invention can be applied to emergency service systems such as a police call system or a fire call system, or to a search for a stray child.

- 5 Incidentally, in the United States, an entrepreneur of a mobile telephone business has an obligation of the detection of subscribers at a fixed accuracy and a fixed probability.

10 In the cellular mobile telephone system, one of the communication station 10 and the communication station 20 shown in FIG. 1 performs a role of a base station, and the other of the communication stations 10, 20 performs a role of a mobile station.

20 If the accuracy of a cellular mobile telephone necessary for detecting a position is about the order of 60 m, the distance resolution of 60 m is converted into the time resolution of about 200 nanoseconds. It is converted into the frequency resolution about 5 MHz. As a current cellular CDMA system, IS 95 is made practicable, and the chip rate thereof is about 1.2 MHz. Accordingly, if over-sampling of about four times is performed, the time resolution of the order of about 200 nanoseconds can be realized. That is, telephone calls and distance detection can simultaneously be realized in the radio specifications of the order in the same degree of the radio specifications of the spread spectrum communication in conformity with IS 95.

(EMBODIMENT 6)

Embodiment 6 of the present invention performs the distance detection and the distance display service between mobile telephones.

5 In the embodiment 6, the communication stations 10, 20 shown in FIG. 1 severally perform roles of mobile telephones, and telephone calls are executed between the two mobile telephones.

10 The order of the distance resolution thereof and the order of the chip rate of spectrum spreading thereof are almost the same as those of the position detection apparatus such as the locator and the navigator of the cellular mobile telephone system of the aforesaid embodiment 5.

(EMBODIMENT 7)

15 FIG. 2 is a block diagram showing the basic configuration of a general communication apparatus in conformity with the spectrum spreading communication mode according to embodiment 7 of the present invention.

20 As shown in the figure, the communication apparatus is configured so as to comprise a control section 120 including a CPU 121 for control and a memory 122, a transmission and reception section 130 including a radio circuit 131, a spreading/despreading section 132 and an antenna 133 for both of transmitting and receiving, a
25 spreading code synchronization acquisition/preservation section 140 including a digital signal processor (DSP) 141 and a memory 142, and a reference timer 150.

Because the antenna 133 for both of transmitting and receiving is connected with both of a transmission system circuit and a reception system circuit, a transmission signal is turned back at the antenna section to be input to the reception system circuit as it is.

In the spectrum spreading communication, that a transmission signal of self station is recognized as a reception signal from the opponent station is prevented in conformity with the FDD system that utilizes different carrier frequencies as the carrier frequency of a transmission wave and the carrier frequency of a reception wave or the TDD system that separates the transmission timing and the reception timing and neglects reception signals during the transmission timing.

If a transmission signal of a self station is received by the self station, it can be realized by the TDD system unless the reception signal during the transmission timing is neglected. If the carrier of the transmission wave is supplied as a demodulation wave of the demodulation circuit of signal reception, that can be realized in the FDD system.

Moreover, in the spectrum spreading communication, because the synchronization acquisition and preservation by the spreading code synchronization acquisition/preservation section 140 is the measurement of the reception timing as it is, it is not necessary to add new hardware for the measurement of the reception timing to the current hardware configuration for performing the

measurement of the reception timing of a turned back transmission signal from self station and a signal from an opponent station.

As an example of the spreading code synchronization acquisition/preservation section 140, the illustration of a delay profile is shown in FIG. 3. In the figure, correlation outputs are detected in the whole phase scope, and a phase ψ_i at which the correlation output larger enough than noises is output is obtained, and then the despreading is performed at the phase ψ_i in ordinary demodulation.

In case of the detection of the distance between a car and the one in front, the time resolution when four times over-sampling at the chip rate of 100 MHz is performed is about 2.5 nanoseconds, and it is converted to about 0.75 m of distance resolution.

Because the chip rate is 1.2 MHz in the CDMA system IS 95 that is actually applied as a cellular standard mobile telephone system, the time resolution at the time of the four times over-sampling is about 200 nanoseconds, and is converted to be about 60 m distance resolution.

As apparent from the aforesaid, the hardware configuration of a current general spectrum spreading communication apparatus meets the necessary conditions of the hardware configuration of a distance measurement apparatus of the present invention. Accordingly the distance detection apparatus of the present invention can easily be realized by storing a program realizing the method

for detecting distance of the present invention into the memory 122 of the control means 120 in a current general spectrum spreading communication apparatus used as it is. (EMBODIMENT 8)

5 Although a spectrum spreading communication apparatus is described as an example in the aforesaid embodiment 7, it is apparent that the present invention can be applied to the whole radio communication system. That is, it is realized only by the addition of reception
10 timing measuring means capable of measuring at the time resolution converted from the required distance resolution to the hardware configuration of a communication apparatus.

 This application is based on the Japanese Patent Application No. HEI 11-210237 filed on July 26, 1999, entire
15 content of which is expressly incorporated by reference herein.

Industrial Applicability

 According to the present invention, in the distance
20 measurement among communication stations performing various communications, especially the communication in conformity with the spectrum spreading communication mode, high accuracy distance detection can be performed.

CLAIMS

1. A distance detection apparatus comprising:

a wireless transmission system circuit that radio
transmits a transmission signal after performing signal
5 processing of the transmission signal for signal
transmission;

a wireless reception system circuit that performs
signal processing of a reception signal, which was received
from an object of distance measurement, for signal
10 reception; and

a distance detection section that measures a signal
delay time in said wireless transmission system circuit
and said wireless reception system circuit, and corrects
a distance measurement value that is obtained by measuring
15 a distance to the object, by using the signal delay time.

2. The distance detection apparatus according to claim
1, wherein

a time difference between transmission timing by said
wireless transmission system circuit and reception timing
20 by said wireless reception system circuit in a case where
the transmission signal output from said wireless
transmission system circuit is directly input into said
wireless reception system circuit is measured, and the
measured time difference is set as the signal delay time.

25 3. The distance detection apparatus according to claim
1, further comprising:

a first reference timer that generates first reference

202510-06251001

timing; and

a signal generation section that generates a periodic signal synchronized with the first reference timing to input the periodic signal to said wireless transmission system circuit as the transmission signal; wherein

said distance detection section detects a first phase difference indicating a degree of a discrepancy of reception timing of the reception signal received from the object from the first reference timing, and detects the distance to the object by using the first phase difference, the detected signal delay time, a second phase difference and a signal delay time both being detected at the object.

4. The distance detection apparatus according to claim 3, wherein

the object is a communication station that has a second reference timer for generating second reference timing independently, and that measures the signal delay time at the object, and that detects a second phase difference indicating a degree of a discrepancy of the reception timing of the reception signal from the second reference timing, and that generates a periodic signal synthesized with the second reference timing in response to the reception of the transmission signal to transmit the generated periodic signal.

5. The distance detection apparatus according to claim 3, wherein

said distance detection section corrects the first

10019270-010300

phase difference by using the detected signal delay time to obtain a corrected phase difference, and detects the distance to the object by using the corrected phase difference and an informed corrected phase difference informed by the object.

6. The distance detection apparatus according to claim 5, wherein

the objects a communication station that has a second reference timer for generating second reference timing independently, and that measures the signal delay time at the object, and that detects a second phase difference indicating a degree of a discrepancy of the reception timing of the reception signal from the second reference timing, and that corrects the second phase difference by using the signal delay time at the object, and that transmits the corrected phase difference as the informed corrected phase difference.

7. The distance detection apparatus according to claim 3, wherein

said distance detection section transmits the first phase difference and the detected signal delay time, or a corrected phase difference of the first phase difference corrected by the detected signal delay time to the object, and receives the second phase difference and the signal delay time, or a corrected phase difference of the second phase difference corrected by the signal delay time from the object.

8. The distance detection apparatus according to claim 5, wherein

said distance detection section obtains the corrected phase difference in conformity with the according formula,

5 (corrected phase difference) = (first phase difference) - (detected signal delay time).

9. The distance detection apparatus according to claim 8, wherein

10 said distance detection section detects the distance to the object in conformity with the following formula,

(distance) = $K \times ((\text{corrected phase difference}) + (\text{informed corrected phase difference})) / 2$

where K is a constant corresponding to the light velocity.

10. The distance detection apparatus according to claim 15 6, wherein

said distance detection section determines a correction quantity for an adjustment of the first reference timer and the second reference timer by a use of the corrected phase difference and the informed corrected phase

20 difference.

11. The distance detection apparatus according to claim 10, wherein

said distance detection section determined a correction quantity of the second reference timer on a basis of the first reference timer in conformity with the following formula,

(correction quantity of second reference timer) =

100192370-010302

((corrected phase difference) - (informed corrected phase difference)) / 2.

12. The distance detection apparatus according to claim 10, wherein

5 said distance detection section determines a correction quantity of the first reference timer on a basis of the second reference timer in conformity with the following formula,

10 (correction quantity of first reference timer) = ((informed corrected phase difference) - (corrected phase difference)) / 2.

13. The distance detection apparatus according to claim 10, wherein

15 said distance detection section detects the distance to the object in conformity with the following formula after said distance detection section performed the adjustment of the first reference timer and the second reference timer on a basis of the correction quantity for the adjustment,

(distance) = K × (corrected phase difference)

20 where K is a constant corresponding to the light velocity.

14. The distance detection apparatus according to claim 10, wherein

25 said distance detection section detects the distance to the object in conformity with the following formula after said distance detection section determined the correction quantity of the second reference timer,

(distance) = K × ((corrected phase difference) -

202510-0426T001

(correction quantity of second reference timer))

where K is a constant corresponding to the light velocity.

15. The distance detection apparatus according to claim 1, further comprising:

5 a first reference timer that generates first reference timing; and

a signal generation section that generates a periodic signal synchronized with the first reference timing to input the periodic signal to said wireless transmission system circuit as the transmission signal; wherein

10 said distance detection section detects a first phase difference indicating a degree of a discrepancy of reception timing of a reflection wave of the transmission signal reflected by the object from the first reference timing, and detects the distance to the object in conformity with the following formula,

$$(\text{distance}) = K \times ((\text{first phase difference}) - (\text{detected signal delay time})) / 2$$

where k is a constant corresponding to the light velocity.

20 16. The distance detection apparatus according to claim 1, wherein

the transmission signal is a spectrum spreading signal.

17. The distance detection apparatus according to claim 1, wherein

25 said apparatus performs wireless communication between the object in conformity with a spectrum spreading

40019270-010000

communication mode.

18. A method for detecting a distance to an object of distance measurement, said method comprising:

5 detecting respective signal delay times of a wireless transmission system circuit for executing signal processing of a transmission signal for transmitting and a wireless reception system circuit for executing signal processing of a reception signal for receiving;

10 transmitting the transmission signal to the object through the wireless transmission system circuit;

receiving a signal transmitted in response to reception of the transmission signal from the object; and

15 calculating a distance to the object by using phase information of the reception signal and the detected signal delay time.

19. A method for detecting a distance to an object of distance measurement, said method comprising:

20 detecting respective signal delay times of a wireless transmission system circuit for executing signal processing of a transmission signal for transmitting and a wireless reception system circuit for executing signal processing of a reception signal for receiving;

transmitting the transmission signal to the object through the wireless transmission system circuit;

25 receiving a reflected wave of the transmission signal from the object ; and

calculating a distance to the object by using phase

10019270.010306

information of the reception signal and the detected signal delay time.

20. A distance detection apparatus comprising:

5 a wireless transmission system circuit that transmits a transmission signal after performing signal processing of the transmission signal for signal transmission;

10 a wireless reception system circuit that performs signal processing to a reception signal, which was received from an object of distance measurement, for signal reception;

a recording medium storing a distance detection program; and

a processor operating in conformity with the distance detection program, wherein

15 the distance detection program makes said processor measure signal delay times in the wireless transmission system circuit and in the wireless reception system circuit, and makes said processor transmit the transmission signal to the object through the wireless transmission system circuit, and further makes said processor calculate a
20 distance to the object by using phase information of the reception signal and the detected signal delay time when the wireless reception system circuit received the reception signal from the object.

25 21. A distance detection apparatus comprising:

a wireless transmission system circuit that transmits a transmission signal after performing signal processing

10016270-040302

of the transmission signal for signal transmission;

a wireless reception system circuit that performs signal processing of a reception signal, which was received from an object of distance measurement, for signal

5 reception;

a recording medium storing a distance detection program; and

a processor operating in conformity with the distance detection program, wherein

10 the distance detection program makes said processor measure signal delay times in the wireless transmission system circuit and in the wireless reception system circuit, and makes said processor transmit the transmission signal to the object through the wireless transmission system
15 circuit, and further makes said processor calculate a distance to the object by using phase information of the reception signal and the detected signal delay time when the wireless reception system circuit received a reflected wave of the transmission signal from the object .

20 22. The distance detection apparatus according to claim 20, wherein

the recording medium is any one of a semiconductor memory, a magnetic recording medium, an optical recording medium, and an optical magnetic recording medium.

1/3

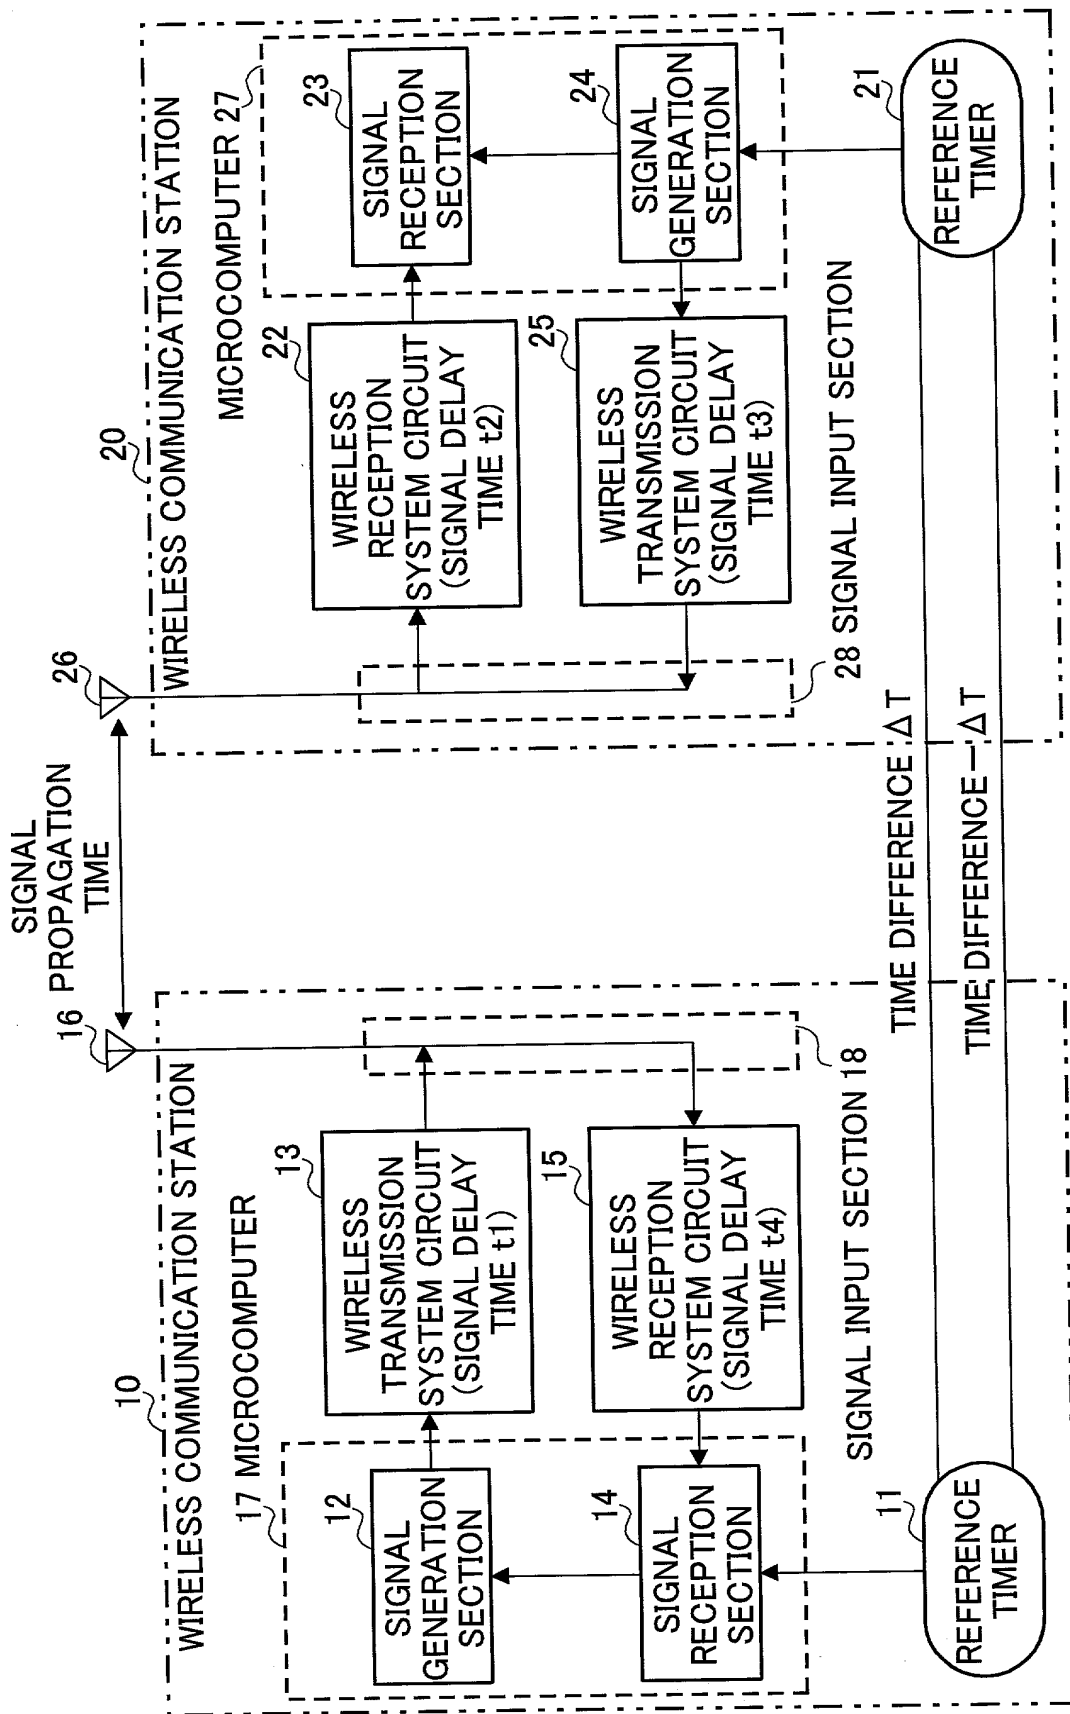


FIG.1

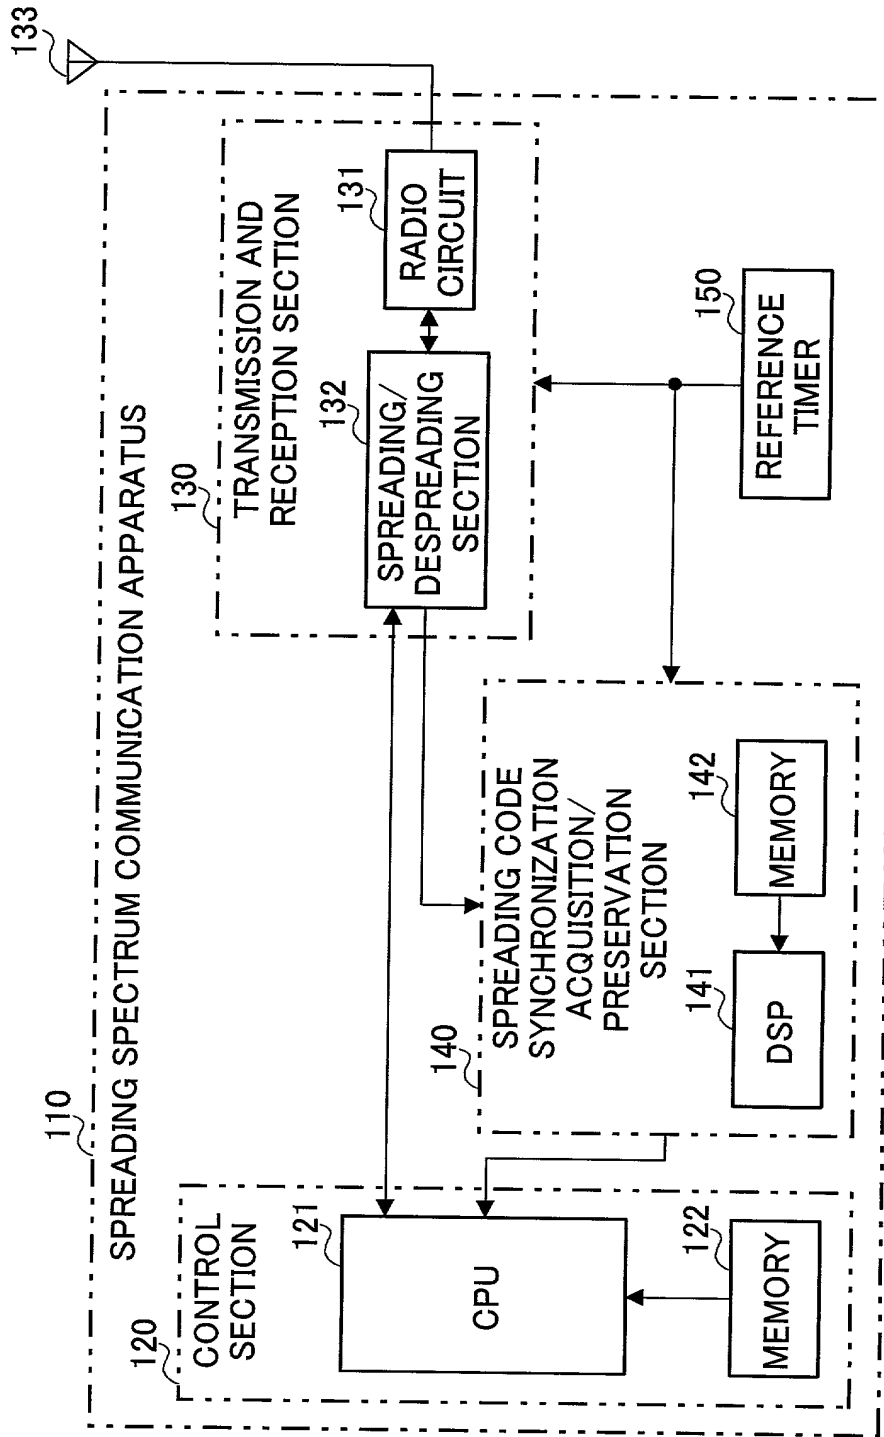


FIG. 2

3/3

TIMING CHART FOR ILLUSTRATION OF DELAY PROFILE

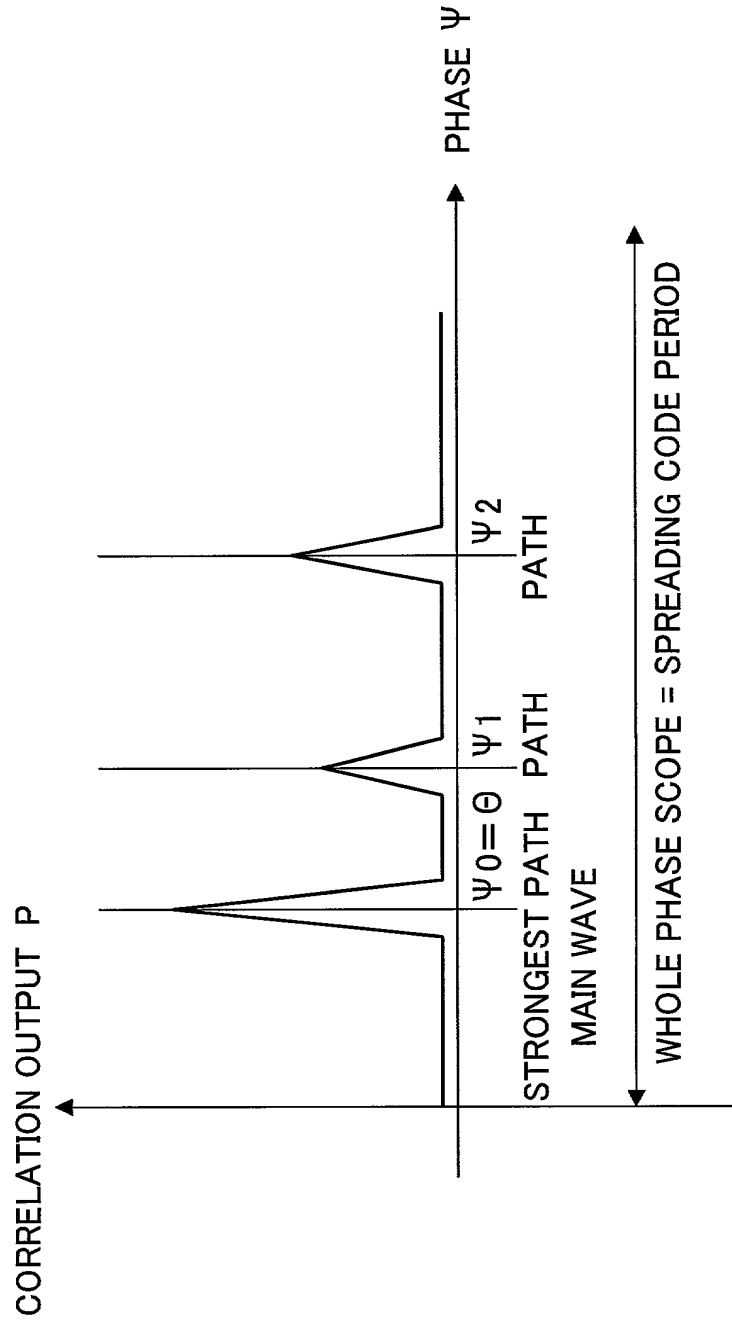


FIG.3

Declaration and Power of Attorney For Utility or Design Patent Application

特許出願宣言書

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり
宣言する:

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおり
であり、

名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、
最初にして唯一の発明者である(一人の氏名のみが下欄に記載されている
場合)か、もしくは本来の、最初にして共同の発明者である(複数の氏名が
下欄に記載されている場合)と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated
below next to my name.

I believe I am the original, first and sole inventor (if only one name
is listed below) or an original, first and joint inventor (if plural
names are listed below) of the subject matter which is claimed
and for which a patent is sought on the invention entitled

METHOD FOR DETECTING DISTANCE

AND DISTANCE DETECTION APPARATUS

上記発明の明細書(下記の欄でX印がついていない場合は、
本書に添付)は、

☐ 年 月 日に提出され、
米国出願番号 として、
該当する場合) 年 月 日に訂正されました。又は、

☐ 特許協定条約国際出願番号 として、
該当する場合) 年 月 日に訂正されました。

私は、前期のとおり補正した請求の範囲を含む前記明細書の内容を検
討し、理解したことを陳述する。

私は、連邦規則法典第37編第1条第56項定義されるとおり、特許資格
の有無について重要な情報を開示すべき義務をあることを認めます。

私は合衆国法典第35部第119条(a-d)項又は第365条(b)項に基づく、
下記の外国特許出願又は発明者証出願、或いは第365条(a)項に基づく、
少なくとも米国以外の1ヶ国を指名したPCT国際出願の外国優先権を主張
し、更に優先権の主張に係わる基礎出願の出願日前の出願日を有する外国
特許出願、又は発明者証出願或いはPCT国際出願を以下に"なし"の箱に
印をつけることにより明記する:

the specification of which is attached hereto unless the following
box is checked:

☐ was filed on _____ as
United States Application Number _____
and was amended on _____ (if applicable) or,

PCT International Application Number PCT/JP00/04971
and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents
of the above identified specification, including the claims, as
amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material
to patentability as defined in Title 37, Code of Federal
Regulations, §1.56.

I hereby claim foreign priority under Title 35, United States Code
§119(a-d) or §365(b) of any foreign application(s) for patent or
inventor's certificate, or §365(a) of any PCT international
application which designated at least one country other than the
United States, listed below. I have also identified below, by
checking the "No" box, any foreign application for patent or
inventor's certificate, or of any PCT international application having
a filing date before that of the application on which priority is
claimed:

Prior foreign applications
先の外国出願

JP 11-210237

(Number)
(番号)

JAPAN

(Country)
(国名)

26/July/1999

(Day/Month/Year Filed)
(出願の年月日)

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願の年月日)

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願の年月日)

Priority claimed
優先権の主張

☒ ☐
Yes No
あり なし

☐ ☐
Yes No
あり なし

☐ ☐
Yes No
あり なし

☐ その他の外国特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional foreign application numbers are listed on a
supplemental priority sheet attached hereto.

Japanese Language Utility or Design Patent Application Declaration

私は、合衆国法典第35部第119条(e)項に基づく、下記の合衆国仮特許出願の利益を主張する。

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Application Number)
(番号)

(Day/Month/Year Filed)
出願の年月日

(Application Number)
(番号)

(Day/Month/Year Filed)
出願の年月日

(Application Number)
(番号)

(Day/Month/Year Filed)
出願の年月日

☐ その他の合衆国仮特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35部第120条に基づく下記の合衆国特許出願、又は第365条(c)項に基づく合衆国を指名したPCT国際出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35部第112条第1項規定の態様で、先の合衆国特許出願又はPCT国際出願に開示されていない限度において、先の出願の出願日と本願の国内出願日又はPCT国際出願日の間に有効となった連邦規則法典第37部第1章第56条に記載の特許要件に所要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)
(出願番号)
(abandoned)

(Day/Month/Year Filed)
(出願の年月日)

(現況)
(特許済み、係属中、放棄済み)

(Status)
(patented, pending,

(Application No.)
(出願番号)

(Day/Month/Year Filed)
(出願の年月日)

(現況)
(特許済み、係属中、放棄済み) (Status)
(patented, pending, abandoned)

☐ その他の合衆国又は国際特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional U. S. or international application numbers are listed on a supplemental priority sheet attached hereto.

私は、ここに自己の知識にもとづいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽による陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以下の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

私、下記署名者は、ここに記載の米国弁護士または代理人に本出願に関し特許商標庁にて取られるいかなる行為に関して、同米国弁護士又は代理人が、私に直接連絡なしに私の外国弁護士或いは法人代表者からの指示を受け取り、それに従うようここに委任する。この指示を出す者が変更の場合には、ここに記載の米国弁護士又は代理人にその旨通知される。

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

Japanese Language Utility or Design Patent Application Declaration

委任状: 私は、下記発明者として、下記に明記された顧客番号を伴う以下の弁護士又は、代理人をここに選任し、本順の手続きを遂行すること並びにこれに関する一切の行為の特許商標庁に対して行うことを委任する。そして全ての通信はこの顧客番号宛に発送される。

顧客番号 7055

現在選任された弁護士は下記の通りである。

Neil F. Greenblum
Bruce H. Bernstein
James L. Rowland
Arnold Turk

POWER OF ATTORNEY: As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

CUSTOMER NUMBER 7055

The appointed attorneys presently include:

Reg. No. 28,394
Reg. No. 29,027
Reg. No. 32,674
Reg. No. 33,094

Address: **GREENBLUM & BERNSTEIN, P.L.C.**
1941 ROLAND CLARKE PLACE
RESTON, VA 20191

直接電話連絡先 : (名称および電話番号)

Direct Telephone Calls to: (name and telephone number)

GREENBLUM & BERNSTEIN, P.L.C.
(703)716-1191

唯一のまたは第一の発明者の氏名	日付	Full name of sole or first inventor
1-00		Tadashi HAYAKAWA
同発明者の署名	日付	Inventor's signature Date
[Signature]		Tadashi Hayakawa December 26, 2001
住所		Residence Konan-ku, Yokohama-shi, Japan JPX
国籍		Citizenship Japan
郵便の宛先		Post Office Address 2-9-28-610, Kamiookanishi, Konan-ku, Yokohama-shi, Kanagawa 233-0002 JAPAN
第二の共同発明者の氏名 (該当する場合)		Full name of second joint inventor, if any
同第二共同発明者の署名	日付	Second Inventor's signature Date
住所		Residence
国籍		Citizenship Japan
郵便の宛先		Post Office Address

(第三またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)